



# NewsTrim III

## Technical Data

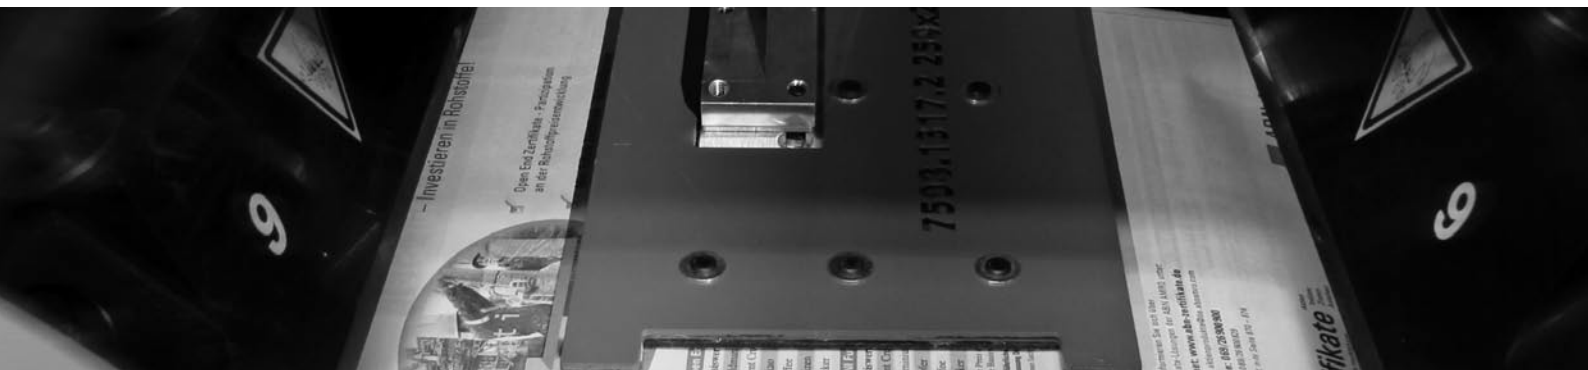

<b>Mechanical Output</b>		max. 40,000 cycles/hr
<b>Production Modes</b>	Single Production	1 product is held and trimmed per pocket
	Double Production	2 products are held and trimmed simultaneously per pocket
<b>Trimming Modules</b>		1 module each for head trim, foot trim and front trim
<b>Number of Knives per Trimming Module</b>		1 fixed trim blade 6 rotating counter-knives
<b>Sizes</b>		A x B
	Untrimmed product	max. 430 x 320 mm (16 <sup>7</sup> / <sub>8</sub> " x 12 <sup>5</sup> / <sub>8</sub> " )
	Product untrimmed	min. 260 x 200 mm (10 <sup>1</sup> / <sub>4</sub> " x 7 <sup>7</sup> / <sub>8</sub> " )
		a x b
	Product trimmed	max. 420 x 285 mm (16 <sup>1</sup> / <sub>2</sub> " x 11 <sup>3</sup> / <sub>16</sub> " )
	Product trimmed	min. 250 x 175 mm (9 <sup>13</sup> / <sub>16</sub> " x 6 <sup>7</sup> / <sub>8</sub> " )
	Cut-off head/foot trim a1	4–30 mm (5/32"–1 <sup>1</sup> / <sub>4</sub> " )
	Cut-off front b1	4–45 mm (5/32"–1 <sup>13</sup> / <sub>16</sub> " )
<b>Product Thickness</b>		Min. 0.25 mm (0.01" ) (Approx. 8 pages tabloid)
		max. 8 mm (5/16" ) (Approx. 260 pages tabloid)
		(42 g/m <sup>2</sup> , paper thickness 0.06 mm (0.002" ))



Dimensions, design and configuration changes reserved.

Muller Martini Marketing AG  
Untere Brühlstrasse 13  
CH-4800 Zofingen, Switzerland  
Telephone +41 (0)62 745 45 75  
Fax +41 (0)62 751 55 50  
info@mullermartini.com  
www.mullermartini.com